
NOTES
1.Material & Finishing
Body: Stainless Steel TYPE 303, Passivate
Insulators: PEI
Center Conductor : Beryllium Copper Gold Plating
2.Electrical Data:
Impedance: 50 Ohms
Frequency: DC~18GHz
VSWR 1.15Max.
3.Mechanical Data
Durability: 500 Cycle Min.
4.Environment Data
Temperature Range: −40−+125 Deg.C
All materials are RoHS compliance

REVISIONS			
LTR	DESCRIPTION	DATE	DCN NO.
A	RELEASE TO MFG.	1/7/21	210107007

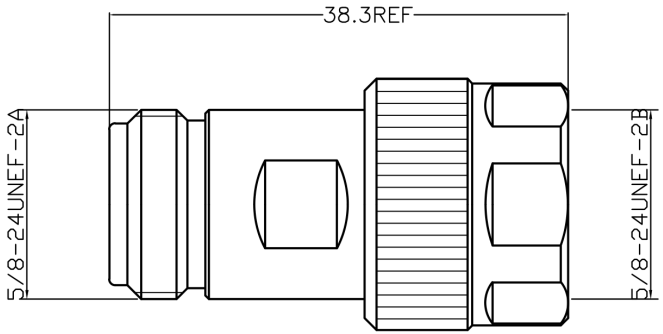

CUSTOMER OUTLINE DRAWING

ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

PROPRIETARY NOTICE

THE INFORMATION CONTAINED IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSFD

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN METRIC TOLERANCES

DECIMAL .X ± .1 .XX ± .05

ANGULAR ±

DO NOT SCALE DRAWING

DRAWIN		TITLE: N Male To N Female Adapter,DC~18GHz	PRECISIONRF Better Connection, Better Life!
CHECKED			
ENGINEERING			REV. A02
MANUFACTURING		DRAWING NO. ADANMF	
QUALITY		SCALE: 4:1 WIGHT(gr):	SHEET OF

Specifications subject to change without notice. This drawing is for reference only.